

MANUFACTURING SOLUTIONS FOR SECURITY PROFESSIONALS



www.powertechna.com

CCTV / AUDIO / ACCESS CONTROL / AUTOMATION



TRUVIEW THK SERIES (IP SYSTEM)

THK-NR31P4-4



- Third Party Network Camera's Supported • Up To 5 Megapixels Resolution Recording
- HDMI And VGA Output At Up To 1920x1080P • HDD Quota And Group Management
- 4 Independent PoE Network Interfaces Are Provided • SnapView Technology

THK-NR31P8-8



- Third Party Network Camera's Supported • Up To 5 Megapixels Resolution Recording
- HDMI And VGA Output At Up To 1920x1080P • HDD Quota And Group Management
- 8 Independent PoE Network Interfaces Are Provided • SnapView Technology

THK-NR50P6-16



- Third Party Network Camera's Supported • Up To 5 Megapixels Resolution Recording
- HDMI And VGA Output At Up To 1920x1080P • HDD Quota And Group Management
- 16 Independent PoE Network Interfaces • 4 SATA, 2 USB 2.0 • SmartView Technology
- 4 Sata Interfaces • 1 e-SATA Interface • Up To 4TB Recognition • 3x - USB 2.0 Interface

THK-NR50P6-32



- Third Party Network Camera's Supported • Up To 5 Megapixels Resolution Recording
- HDMI & VGA Output At Up To 1920x1080P • HDD Quota And Group Management
- 16 Independent PoE Network Interfaces • 4 SATA, 2 USB 2.0 • SmartView Technology
- 4 Sata Interfaces • 1 e-SATA Interface • Up To 4TB Recognition • 3x - USB 2.0 Interface

THK-NCA06-FE



Fisheye Junction Box
DS-1280ZJ-DM25(M1)



Fisheye Pendant Mount
DS-1271ZJ-DM25(M1)

- 1/1.8" progressive scan CMOS • 6MP image sensor
- 360 degrees view angle • Multiple viewing modes
- Multiple ePTZ streams with preset and patrol
- Ceiling, Wall, or Table mount modes
- Up to 30m IR Range • IP66

THK-NRA0-64



- Third Party Network Camera's Supported
- Up To 5 Megapixels Resolution Recording
- HDMI And VGA Output At Up To 1920x1080P
- Dual Gigabit Network Interface
- eSATA Interface For Recording Or Archiving • SnapView Technology

THK-NC303TD



Wall Mount Bracket
DS-12727-110B



Junction Box
DS-1280ZJ-DM18

- 3MP (2048 x 1536) resolution
- Full HD 1080p real-time video
- Fixed Lens (**2.8mm, 4mm, 6mm**)
- 3D DNR & DWDR & BLC
- IR LED's: up to 30m, IP66, Vandal Proof

THK-NC303XB



Junction Box DS-1260ZJ

- 3 Mega Pixel (2048x1536)
- Full HD 1080P
- Fixed Lens (**4mm, 6mm**)
- 3D DNR, DWDR & BLC
- EXIR Illuminators, IP66, PoE, Vandal Proof

THK-NC303XD



Wall Mount Bracket
DS-1273ZJ-130-TRL

- 3 Mega Pixel (2048x1536)
- Full HD 1080P
- Fixed Lens (**2.8mm, 4mm, 6mm**)
- 3D DNR, DWDR & BLC
- EXIR Illuminators, IP66, PoE, Vandal Proof

THK-NC303-TDC(Wi-Fi)



- 3 Mega Pixel (2048x1536)
- Full HD 1080P
- Fixed Lens (**2.8mm, 4mm, 6mm**)
- 3D DNR, DWDR & BLC
- IR Illuminators, IP66, PoE, Vandal Proof

THK-NC303VD



Junction Box
DS-1280ZJ-DM21



Wall Mount Bracket
DS-1273ZJ-135



Ceiling Mount Bracket
DS-1271ZJ-135

- 3 Mega Pixel (2048x1536)
- Full HD 1080P
- 2.8-12mm Vari-Focal Lens
- 3D DNR, DWDR & BLC
- IR Illuminators, IP66, PoE, Vandal Proof

THK-NC303VB



- 3 Mega Pixel (2048x1536)
- Full HD 1080P
- 2.8-12mm Vari-Focal Lens
- 3D DNR, DWDR & BLC
- IR Illuminators, IP66, PoE, Vandal Proof

TRUVIEW I-SERIES (IP SYSTEM)

TI-NVRD32BF



- Up to 16 channel with 1080P real time live view (32 total input)
- H.264/MJPEG dual codec decoding
- Max 200Mbps incoming bandwidth
- Up to 5Mp resolution preview & playback
- HDMI/ VGA/TV simultaneous video output
- 8/16 channel synchronous real time playback, GRID interface
- Support 4 SATA HDDs up to 16TB, 1 eSATA up to 16TB, 2 USB (1 USB3.0)
- Support IPC UPnP, 2 NIC

TI-NVRD32CF



- Up to 16 channel with 1080P real time live view (32 total input)
- H.264/MJPEG dual codec decoding
- Max 200Mbps incoming bandwidth
- Up to 5Mp resolution preview & playback
- 8/16 channel synchronous real time playback, GRID interface
- Support 8 SATA HDDs up to 32TB, 1 eSATA up to 16TB, 3 USB (1 USB3.0)
- Support IPC UPnP, 2 NIC

TI-NVRD8AFP



- Up to 8 channel IP camera input
- H.264/MJPEG dual codec decoding
- Max 200Mbps incoming bandwidth
- Up to 5Mp resolution preview & playback
- 8 channel synchronous real time playback, GRID interface
- Support 2 SATA HDDs up to 8TB, 2 USB
- Support IPC UPnP, 8PoE ports

TI-B28Z30I



- 3 Mega Pixel (2048x1536)
- H.264&MJPEG dual-stream encoding
- 2.8~12mm **motorized lens**
- DWDR, ICR, 3DNR, BLC, PoE, IP66

TI-V28Z30I



- 3 Mega Pixel (2048x1536)
- H.264&MJPEG dual-stream encoding
- 2.8~12mm **motorized lens**
- DWDR, ICR, 3DNR, AWB, AGC, BLC, PoE, IP66

TI-D36F30I



- 3 Mega Pixel (2048x1536)
- H.264&MJPEG dual-stream encoding
- 3.6mm fixed lens
- DWDR, ICR, 3DNR, BLC, PoE, IP66

TI-B36F30I



- 3 Mega Pixel (2048x1536)
- H.264&MJPEG dual-stream encoding
- 3.6mm fixed lens
- DWDR, ICR, 3DNR, BLC, PoE, IP66

TI-E36F30I



- 3 Mega Pixel (2048x1536)
- H.264&MJPEG dual-stream encoding
- 3.6mm fixed lens
- DWDR, ICR, 3DNR, BLC, PoE, IP66

TI-P2MP12XMS



- IP PTZ
- 2 MP Full Frame
- 12x optical zoom
- DWDR, ICR, DNR(2D&3D), Auto iris, Auto focus, 360 P/T, IP66, PoE

TI-P2MP30XIR



- IP PTZ
- 2 MP Full Frame
- 30x optical zoom
- DWDR, ICR, Ultra DNR, Auto iris, Auto focus, 360 P/T, IP66, PoE

ACCESSORIES

<p>Junction Box PFA122</p> <p>TI-B28Z30I/ TI-B36F30I/ TI-E36F30I</p>	<p>Junction Box PFA131</p> <p>TI-D36F30I</p>	<p>Corner Mount Bracket PFA151</p> <p>TI-B28Z30I/ TI-B36F30I/ TI-P2MP12XMS/ TI-P2MP30XIRAT</p>	<p>Wall Mount Bracket PFB200W</p> <p>TI-D36F30I/ TI-E36F30I/ TI-V28Z30I</p>	<p>Junction Box PFA130</p> <p>TI-B36F30I/ TI-E36F30I</p>	<p>TI-POE4</p> <p>4-Port 10/100 Mbps / PoE 1 Uplink port 65W Max IEEE802.3af</p>	<p>TI-POE8-1</p> <p>8-Port 10/100 Mbps / PoE 1 Gigabit TP/SFP Ports 150W Max IEEE802.3af/at</p>	<p>TI-POE24-2</p> <p>24-Port 10/100Mbps / PoE 2 Gigabit TP/SFP Combo Ports Web Smart Ethernet Switch 400W Max</p>
--	--	--	---	--	--	---	---

SWITCH

UNITEK HD-SDI DVR

UH-HDF04



- 4CH Hybrid (HD-SDI / Analog Any Input) (Auto Detect On Plug-In)
- 120/120/120 IPS @ 1080P
- 3D Comb Filter, Mirroring, Digital Zoom, Panorama Search, Built-in DDNS
- 4TB HDD Supported, 2 Internal Drive Bays, 1 eSATA supports up to 16TB

UH-HDF16



- 8CH Hybrid (HD-SDI / Analog Any Input) (Auto Detect On Plug-In)
- 480/240/120 IPS @ 1080P
- 3D Comb Filter, Mirroring, Digital Zoom, Panorama Search, Built-in DDNS
- 4TB HDD Supported, 2 Internal Drive Bays, 1 eSATA supports up to 16TB

UH-HDF08



- 8CH Hybrid (HD-SDI / Analog Any Input) (Auto Detect On Plug-In)
- 240/240/120 IPS @ 1080P
- 3D Comb Filter, Mirroring, Digital Zoom, Panorama Search, Built-in DDNS
- 4TB HDD Supported, 2 Internal Drive Bays, 1 eSATA supports up to 16TB

UH-HDF16X



- 16CH Hybrid (HD-SDI / Analog Any Input) (Auto Detect On Plug-In)
- 480/480/120 IPS @ 1080P
- 3D Comb Filter, Mirroring, Digital Zoom, Panorama Search, Built-in DDNS
- 4TB HDD Supported, 5 Internal Drive Bays, 1 eSATA supports up to 16TB

UH-WMHD04/08



- UH-WMHD04: 4CH HD-SDI (1080P / 720P), 120/120 IPS @ 1080P
- UH-WMHD08: 8CH HD-SDI (1080P / 720P), 240/120 IPS @ 1080P
- Fully MAC and Windows Compatible, Built-In DDNS
- 4TB HDD Supported, 2 Internal Drive Bays, 1 eSATA supports up to 16TB

VMU-100



- Video Management Unit : For Watchman DVRs
- Video Wall • Virtual Matrix
- Multi-Site Monitoring
- Public Monitor Viewing

HD-SDI

- HD-SDI technology provides the maximum picture quality in 1080p Full HD mode.
- HD-SDI has lower latency vs. IP: since HD SDI video is transmitted uncompressed.
- One of the benefits of using HD-SDI is that it is a cost effective solution to IP and an improvement over analog cameras.
- The video is uncompressed at the camera so you get the full 1080P transmitted video and the stream is reliable with low latency without frame delay
- The video stream is also not dependant on the network so if the network fails, the system remains unaffected where as it would be a different situation with an IP solution.

What is EX-SDI?

EX-SDI stands for "Extended Serial Digital Interface" which is enhanced technology from the HD-SDI family, which ensures Full HD signal transmission without decreasing quality up to 1000FT

Advantages of EX-SDI / HD-SDI

The advantage of this technology allows you to use your standard coax cable on your old DVR system and upgrade to a High Definition Video Surveillance System (Plug And Play). Without this type of solution you would have had no choice but to use IP camera's and in doing so, you would have had to re-run all wires to a Cat5 type cable in order to get HD video.

HD-SDI CAMERA

UH-DFHD8ES	UH-DV8TSH	UH-DVHD8TD	UH-VVHD8TD	UH-BFHD0ES
 <ul style="list-style-type: none"> • HD-SDI: 1080P Full Frame • 3.6MM Fixed Lens, (24IR: 65Ft) • CMOS, EDN, DWDR, DNR, DC12V 	 <ul style="list-style-type: none"> • HD-SDI: 1080P Full Frame • 2.8~12MM Vari Focal Lens, (30IR:80Ft) • CMOS, OSD, TDN, DWDR, 12VDC 	 <ul style="list-style-type: none"> • 1/2.9" Sony 2.1MP CMOS(full-HD) • 1080p@25/30fps • 24 IR LEDs, 0 Lux 80 ft • OSD, D-WDR, 3D-DNR, ICR • P-IRS, 3dnr, Send-Up Defog 	 <ul style="list-style-type: none"> • 1/2.9" Sony 2.1MP CMOS • 1080p@25/30fps • 24 IR LEDs, 0 Lux 80 ft • OSD, WDR, 3D-DNR, ICR • Vandal-proof & Waterproof(IP68) • DC12V/AC24(w/Backplate) 	 <ul style="list-style-type: none"> • HD-SDI: 1080P Full Frame • 3.7mm Fixed Lens • 1/2.9" Panasonic 2.1 MP CMOS, 0.1 Lux (F1.2), EDN, DNR, DC12V
UH-BFHD9ES	UH-BVHD8S	UH-BVHD14TD	UH-VFHD0S-0	UH-PHD10TA
 <ul style="list-style-type: none"> • HD-SDI: 1080P Full Frame • 4.3MM Fixed Lens, (30IR: 80Ft) • CMOS, EDN, DWDR, DNR, DC12V 	 <ul style="list-style-type: none"> • 1/2.9" Sony 2.1MP CMOS • 1080p@25/30fps • IR 40 LEDs, 0 Lux 90m • OSD, WDR, 3D-DNR • Vandal-proof & Waterproof (IP68) • DC12V 	 <ul style="list-style-type: none"> • 1/2.9" Sony 2.1MP CMOS • 1080p@25/30fps • IR 70 LEDs, 0 Lux 180 ft • OSD, WDR, 3D-DNR, ICR • Vandal-proof & Waterproof (IP68) • DC12V/AC24 	 <ul style="list-style-type: none"> • HD-SDI: 1080p Full • 3.6mm Fixed Lens • WDR, BLC, AGC, 3DNR • IP 66 • DC12V/AC24V 	 <ul style="list-style-type: none"> • Mini PTZ - HD-SDI: 1080P • 2 Mega-pixel 1080P Full HD • 10x optical zoom, DSS, WDR, BLC, Auto Focus, 360 Panning, 180 degree tilt w/ digital flip • 24VAC
UH-PTZ-CPA312	UH-PTZ-CMA100	UH-PTZ-PMA100	HV-SDI2HMDI	HDEX-1000
 <ul style="list-style-type: none"> • Metal Ceiling Mount for Mini HD-SDI PTZ Cameras, Outdoor 	 <ul style="list-style-type: none"> • Corner Mount Adapter for outdoor PTZ cameras (No fastener or screws included) 	 <ul style="list-style-type: none"> • Pole Mount Adapter for outdoor PTZ cameras (No clamp or fastener included) 	 <ul style="list-style-type: none"> • SD-HD 3G-SDI to HDMI & CVBS Converter • 5V~24VDC • Automatically embed SDI Audio to HDMI Signal • Support all SDI Input Format • 1ch SDI Signal Loop Out • User Selectable Output Format (HDMI & CVBS) 	 <ul style="list-style-type: none"> • Distance extension up to 1000FT • Surge protection function • Compact and light-weight case for easy installation. • Dual power(DC12V/AC24V) model is available separately.
TH-BCFH6S	TH-BCVH12S	TH-ECFH6S-B/W	TH-ECVH9S-B/W	TH-P20Z80IR
 <ul style="list-style-type: none"> • 1/3" Panasonic 2.1Megapixel CMOS Sensor, HD-SDI 1080P@25fps/30fps • 3.6MM Fixed Lens, (24IR: 65Ft) • WDR, BLC, HLC, D-ZOOM, DNR, ACCE, IP66, 12VDC 	 <ul style="list-style-type: none"> • 1/3" Panasonic 2.1Megapixel CMOS Sensor, HD-SDI 1080P@25fps/30fps • 2.8-12mm Vari-Focal Lens (42IR: 120FT) • WDR, BLC, HLC, D-ZOOM, DNR, ACCE, IP66, 12VDC 	 <ul style="list-style-type: none"> • 1/3" Panasonic 2.1Megapixel CMOS Sensor, HD-SDI 1080P@25fps/30fps • 3.6MM Fixed Lens, (24IR: 65Ft) • WDR, BLC, HLC, D-ZOOM, DNR, ACCE, IP65, 12VDC 	 <ul style="list-style-type: none"> • 1/3" Panasonic 2.1Megapixel CMOS Sensor, HD-SDI 1080P@25fps/30fps • 2.8-12mm Vari-Focal Lens (36IR: 110FT) • WDR, BLC, HLC, D-ZOOM, DNR, ACCE, IP65, 12VDC 	 <ul style="list-style-type: none"> • 1/2.8" 2 Megapixel Exmor CMOS sensor, HD-SDI • 4.7mm~94mm(20x) Optical Zoom • DWDR, TDN, DNR, Auto Iris, Auto Focus, AWB, AGC, BLC, IP66, AC 24V • IR up to 150m

UNITEK AHD-SERIES (HYBRID SYSTEM)

Easiest Upgrade from Analog to HD 1080P

WATCHMAN

ANALOG HIGH DEFINITION OVER COAX or CAT5e

WATCHMAN AHD Series: UK-WMAHD



EZ-LINK
USER REMOTE ACCESS



EZ NETWORK
AUTO UPNP, AUTO DDNS



EZ-OSD INTERFACE
ON SCREEN DISPLAY



VMU SUPPORTED
VIDEO MANAGEMENT UNIT

WATCHMAN AHD is a brand new premium hybrid system brought to you by Unitek. One of the many benefits to this technology is that while displaying crisp 1080p HD resolution, it maintains the long transmission distance that of an analog system (over 1000ft. with either cat5e or coax). Our AHD cameras are also fully hybrid, capable of switching between analog and 1080p resolution with a flick of a button. Unitek AHD is truly an innovation that both the big system integrators and the end-users alike can easily appreciate.

What is AHD Technology?

❖ AHD Stands For – Analog High Definition

Benefits Of AHD Technology:

✓ **Easy Operation**

100% plug and play. No complicated network knowledge required, Easy to use.

✓ **Affordability And Quality**

Secured high definition security surveillance products in analog's price.

✓ **Open Standards**

Third-party standard, Compatibility with other supplier's AHD products.

✓ **High Definition**

AHD Camera are available in both 720P & 1080P

✓ **Long Distance Transmission**

Distance Up To 500 Meters

✓ **No Delay**

Unlike IP Cameras AHD cameras transmit data that is not encoded resulting in no process and no delay real time and complete transmission.

✓ **Backwards Compatible**

Compatibility with the standard Analog equipment like Video Splitters, Video Baluns, RG59 Coax Cable.

UNITEK AHD-SERIES (HYBRID SYSTEM)

UK-WMAHD04/08/16



Analog High Definition DVR



- 4CH/8CH/16CH Hybrid (AHD/Analog) • 60/120/240 IPS @ 1080p • Multi level user management (admin & 100 users) • Easy DDNS using MAC or create your own domain
- Remote DVR monitoring function • Easy network setup using UPnP • 2 SATA up to 12TB w/ 1 eSATA

UK-B28VAH14TD



- 1/3" SONY EXMOR CMOS Image Sensor
- Full 1080p AHD or 960H Analog Resolution
- 2.8-12mm Vari-Focal Lens
- 40pcs of IR LEDs (up to 120ft.)
- Ceiling, wall, slope mountable/Weather proof (IP68)
- TDN, DWDR, 3D DNR, Sense up, Smart IR
- Dual Voltage; 12VDC/24VAC

UK-V28VAH8TD



- 1/3" SONY EXMOR CMOS Image Sensor
- Full 1080p AHD or 960H Analog Resolution
- 2.8-12mm Vari-Focal Lens
- 24pcs of IR LEDs (up to 80ft.)
- Vandal & Weather proof (IP68)
- TDN, DWDR, 3D DNR, Sense up, Smart IR
- Dual Voltage; 12VDC/24VAC

UK-D28VAH8TD



- 1/3" SONY EXMOR CMOS Image Sensor
- Full 1080p AHD or 960H Analog Resolution
- 2.8-12mm Vari-Focal Lens
- 24pcs of IR LEDs (up to 80ft.)
- TDN, DWDR, 3D DNR, Sense up, Smart IR
- Dual Voltage; 12VDC/24VAC

TA-BAHF6TS



- 1/3" SONY EXMOR CMOS
- Full 1080p AHD or 960H Analog Resolution
- 3.6mm Fixed Lens
- 30 pcs of IR LEDs (up to 90ft.)
- Ceiling, wall, slope mountable/Water proof (IP66)
- TDN, DWDR, 3D DNR, 12VDC

TA-BAHV12TS



- 1/3" SONY EXMOR CMOS
- Full 1080p AHD or 960H Analog Resolution
- 2.8-12mm Vari-Focal Lens
- 42 pcs of IR LEDs (up to 120ft.)
- Ceiling, wall, slope mountable/Water proof (IP66)
- TDN, DWDR, 3D DNR, 12VDC

TA-EAHF6TS-W/G



- 1/3" SONY EXMOR CMOS
- Full 1080p AHD or 960H Analog Resolution
- 3.6mm Fixed Lens
- 24 pcs of IR LEDs (up to 65ft.)
- Vandalproof/Weather Resistant (IP65)
- TDN, WDR, 3D DNR, 12VDC

TA-EAHV9TS-W/G



- 1/3" SONY EXMOR CMOS
- Full 1080p AHD or 960H Analog Resolution
- 2.8-12mm Vari-Focal Lens
- 36 pcs of IR LEDs (up to 100ft.)
- Vandalproof/Weather Resistant (IP65)
- TDN, WDR, 3D DNR, 12VDC

ACCESSORIES

PT-JB-D1- W/G



Junction box for TA-EAHV9TS Aluminum casing (white/grey)

PT-JB-D2- W/G



Junction box for TA-EAHF6TS Aluminum casing (white/grey)

AB24



Junction box for UK-V28VAH8TD Aluminum casing (white)

UK-MWVD-W



Wall bracket for UK-V28VAH8TD Aluminum casing (white)

PT-VB202P



Video Balun for twisted pair cables (pair) Also available in "L" shape or without pigtail

THK TVI-SERIES (TRI-BRID SYSTEM)

TA-HDTV104/08



- Tri-Brid Technology (Analog, HD-TVI, IP)
- Supports 1080P/720P/960H/D1/CIF • HD Video Over Coax
- 4TB HDD Supported
- Mobile App Supported (IOS/Android)
- H.264 Compression
- 4CH + 1 (8CH + 2) Additional IP Camera Channel

TA-HDTV16




- Tri-Brid Technology (Analog, HD-TVI, IP)
- Supports 1080P/720P/960H/D1/CIF • HD Video Over Coax
- 4TB HDD Supported
- Mobile App Supported (IOS/Android)
- H.264 Compression
- 16CH + 2 Additional IP Camera Channel

TA-HDTV132



- Tri-Brid Technology (Analog, HD-TVI, IP)
- Supports 1080P/720P/960H/D1/CIF • HD Video Over Coax
- 4TB HDD Supported
- Mobile App Supported (IOS/Android)
- H.264 Compression
- 32CH + Additional IP Camera Channels

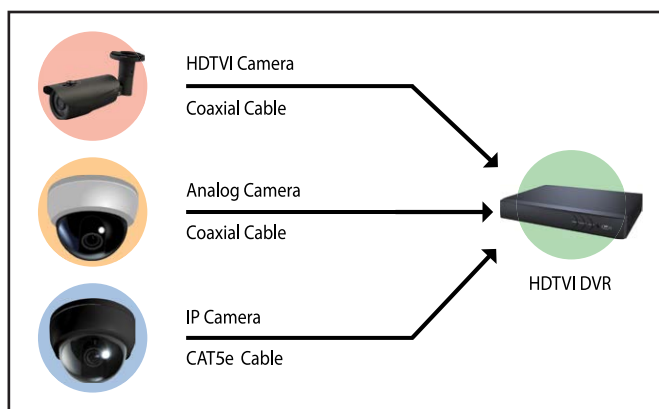

UT-DF36ES



- Indoor IR Dome
- 1080P Resolution
- 3.6mm Fixed Lens
- CMOS, EDN, DC12V

UT-BF36ES



- Outdoor IR Bullet
- 1080P Resolution
- 3.6mm Fixed Lens
- CMOS, EDN, DC12V
- IP 66

UT-BV28HTS



- Outdoor IR Bullet
- 1080P Resolution
- 2.8~12mm Vari-Focal Lens
- Exmor CMOS, TDN, DC12V
- IP 67

UT-EV28HTS



- Outdoor IR Dome
- 1080P Resolution
- 2.8~12mm Vari-Focal Lens
- Exmor CMOS, TDN, DC12V
- IP 67

TA-ETV9TS-W



- Outdoor IR Dome
- 1080P Resolution
- 2.8~12mm Vari-Focal Lens
- AGC, BLC, AWB, DNR, Auto ICR, DC12V
- IP 65

TA-BTVF6TS



- Outdoor IR Bullet
- 1080P Resolution
- 3.6mm Fixed Lens
- AGC, BLC, AWB, DNR, Auto ICR, DC12V
- IP 66

TA-BTV12TS



- Outdoor IR Bullet
- 1080P Resolution
- 2.8~12mm Vari-Focal Lens
- AGC, BLC, AWB, DNR, Auto ICR, DC12V
- IP 66

TA-ETV6TS-W



- Outdoor IR Dome
- 1080P Resolution
- 3.6mm Fixed Lens
- AGC, BLC, AWB, DNR, Auto ICR, DC12V
- IP 65

ANALOG DVR & CAMERAS

WATCHMAN 4CH/8CH/16CH



- 960H Real Time Recording
- Programmable Spot Output
- Custom Built-In DDNS
- E-Sata Supported
- Multi-Level User Management

UK-D28V78TD



- Galaxy 7 (700 TVL)
- 2.8~12mm Vari-focal Lens
- 24 IR LEDs up to 80ft
- Full OSD, DIS, 3DNR, TDN
- Sense-Up(1024X)
- HLC, AWB, BLC, LSC, DWDR
- DC12V / AC24V

UK-V28V78TD



- Galaxy 7 (700 TVL)
- 2.8~12mm Vari-focal Lens
- 24 IR LEDs up to 80 ft
- DC12V / AC24
- IP66
- Backplate Included

UK-MWVD-W



- Wall Bracket for Unitek Vandal Dome (UK-V28V78TD)

UK-D36F96ES2-W



- INDOOR IR DOME - 700TVL CCD(960H)
- 3.6mm Fixed Lens, (24IR, 65FT) DWDR, DC12V

UK-B28V714TD



- Outdoor IR Bullet - 700TVL
- 2.8~12mm Vari Focal Lens (40 IR, 140Ft)
- TDN, SENSE UP (1024X), DWDR, DC12V/AC24V
- IP 68

UK-B56V250TD2



- Outdoor IR Bullet - 700TVL
- 6~50mm Vari Focal Lens (35LEDs+2 High Intensity Super IR LEDs(250ft))
- TDN, SENSE UP, DWDR, DC12V/AC24V
- IP 67

TA-M36F0S(covert)



- 1/3" Sony Super HAD CCD (550 TVL)
- 3.6mm Fixed Lens, 0 Lux / F1.2
- DC 12V
- 1/3" CCD (700TVL)

TA-EL28FS



- 1/3" HD Color CCD
- 1000 TV Lines
- 2.8mm Fixed Lens
- Weatherproof
- 12V DC

UK-P12ITS



- Indoor Mini PTZ (Surface Mt) -700 TVL
- Sony 960H with Effio-P, True WDR, TDN
- 12x Optical & 32x Digital Zoom (3.8~45.6mm)
- Indoor, DC12V, 1.5A

UK-P120TA



- Outdoor Mini PTZ (Wall Mt) -700 TVL
- Sony 960H with Effio-P, True WDR, TDN
- 12x Optical & 32x Digital Zoom (3.8~45.6mm)
- Outdoor, AC 24V, 3A

UK-P270TA/UK-P360TA

28xOptical 36xOptical



- Outdoor Mini PTZ (Wall Mt) -700 TVL
- Sony 960H with Effio-P, True WDR, TDN, Image Stabilizer
- Outdoor, AC 24V, 3A

UH-PTZ-CPA312



- Ceiling Mount for (UH-PTZ) , Aluminm & Steel body, Cool Gray

WTX-1200A



- PTZ Controller
- Joystick Keyboard
- RS-485/RS-422 Communication
- Max 255 Cameras, Graphic LCD Display (2 lines)

TA-EC10F6ES-W/G



- Vandal Proof Aluminum Housing
- 1/3" SONY 1.3MP Sensor
- 720P, 1000TVL, Low Illumination
- DNR, IR LED
- 3.6mm/F2.0 Board Lens
- Water Resistance: IP65

TA-EC10V9ES-W/G



- Vandal Proof Aluminum Housing
- 1/3" SONY 1.3MP Sensor
- 720P, 1000TVL, Low Illumination
- DNR, IR LED
- 2.8-12mm Vari-Focal Lens
- Water Resistance: IP65

TA-BC10F6TS



- Weather Proof Aluminum Housing
- 1/3" SONY 1.3MP Sensor
- 720P, 1000TVL, Low Illumination
- DNR, TDN, IR LED
- 3.6mm/F2.0 Board Lens
- Water Resistance: IP66

TA-BC10V12TS



- Weather Proof Aluminum Housing
- 1/3" SONY 1.3MP Sensor
- 720P, 1000TVL, Low Illumination
- DNR, IR LED
- 2.8-12mm Vari-Focal Lens
- Water Resistance: IP66

TA-P23Z80TIR



- 1/4" CCD, 700TVL
- 23x optical zoom, DWDR, D&N(ICR)
- DNR (2D&3D), Max 240°/S pan speed, IP 66
- -40~60°C, IR LEDs up to 100m



zipato®

SMART BUSINESS & HOME

Security and energy management in one



- ✓ **Security**
SMART ALERTS IN CASE OF INTRUDER, FIRE, GAS OR WATER LEAKAGE
- ✓ **Control With Smartphone**
STAY IN TOUCH WITH YOUR HOME WHEREVER YOU ARE
- ✓ **Energy Management**
CONTROL LIGHTING, HEATING, COOLING, SHUTTERS AND OTHER DEVICES
- ✓ **Central Monitoring System**
24/7 MONITORING STATION ALERTING IN CASE OF ANY FAILURE, CONNECTION LOSS OR ALARM EVENT

SMART ALARM

Complete protection

- +** **SMART DETECTION**
intruder, fire, gas or water leakage, both wired and supported by wireless sensors
- 🔊** **SMART ALERTS**
voice alerts by phone, text and e-mail messages and unlimited number of contacts (friends, relatives, local authorities...)
- 🏠** **PRESENCE SIMULATION**
home "auto-pilot" controlling light and other appliances to detect potenti intruders
- 📧** **CUSTOM ALERTS**
customizing alerts by setting alert triggers [e.g. if a child arrived home or not]
- 📧** **NEIGHBOURHOOD WATCH**
silent text alerts to neighbours which are subscribed to free „watch“ service

SMART CONTROL


SAVING WHILE INCREASING COMFORT

control via automated rules or from your mobile APP



- 🏠** **LIGHTS**
 - turn on/off and dimm using your smartphone
 - automation [while entry/exit, sunrise/sunset, groups, scenes]
- 🏠** **BLINDS, SHUTTERS**
 - opening and closing using a smart phone
 - automatic control [environmental conditions, groups, scenes]
- 🏠** **HEATING, COOLING**
 - setting each heating and cooling device separately using a smartphone
 - automatic temperature setting for each room
- 🏠** **SCENES**
unlimited
 - automatically control all devices at once
 - create and customize unlimited number of scenes

Business or Home a Smart Place

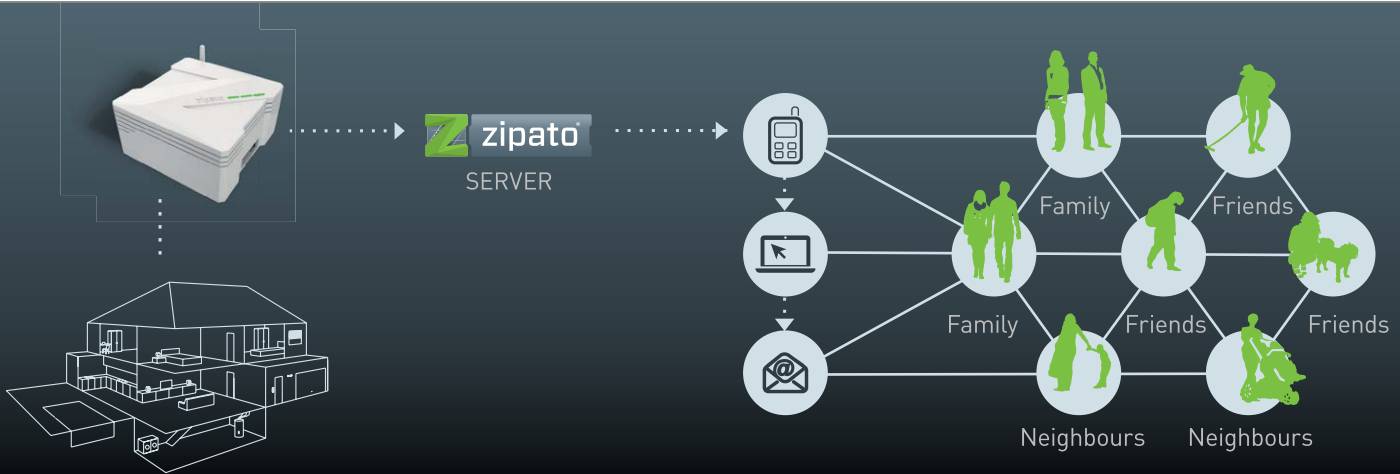

ADDITIONAL MODULES



Power module
Measure up to 4 electrical circuits in a real time.



KNX module
Allows integration of Zipabox into KNX network.



433 module
Connect low cost automation devices based on various protocols on 433Mhz.



Backup module
Provides whole system with up to 24h power autonomy and ensures plug and play 3G backup



Security module
Connect hard wired security sensors directly to Zipabox.



ZigBee module
Add ZigBee compatible devices to your Zipato network.



Serial module
Interconnect with an existing security alarm system or send RS232/485 messages.



EnOcean module
Integrate self powered wireless devices based on EnOcean standard.



P1 module
Connection of external electricity meters by using P1 interface.



Power Extender module
Extends powermodule in order to measure up to 4 more electricity circuits.



3G USB Stick
Plug in stick for 3G backup connectivity.



Amper Meter Clamp
AC current sensor with DC maleplug 5.5*2.1mm for power module and power module extender.

ADDITIONAL ACCESSORIES



MULTISENSOR DUAL
Get info about the activity in any room, as well as the current room temperature.



MULTISENSOR TRIO
Door/Window sensor, temperature meter and illuminance meter in one.



MULTISENSOR QUAD
Door/Window sensor, temperature meter, illuminance meter and presence detector in one.



RGBW BULB
Control color and intensity of home lights by just using your smartphone.

Connect everything:



DOOR/WINDOW SENSOR
Get info about any door, window or cabinet opening wherever you are.



MINI KEYPAD RFID
Access your home, arm/disarm your security system or run automation scenario.



RFID KEY TAG
Small, suitable as key ring.



WIRELESS RADIATOR VALVE
Controlling radiator valve remotely.



MM SWITCH DOUBLE
Small, invisible, controls two electrical circuits and measure the electricity consumption.



IN-WALL ROLLER SHUTTER
Small, invisible, controls, roller shutter or any other motor.



MM DIMMER
Small, invisible dimmer with energy consumption metering.



ZIPATO TABLET
Easiest and most attractive way to control any home.



PUBLIC ADDRESS SYSTEM & SPEAKER



TA-30 / TA-50 MIXER AMPLIFIER

Front Controls

- 3ch Volume Control and Tone Control

Rear Controls

- Trim Pot Control for 3 Input Channel
- 1/4" Phone Jack for 1-3 Input
- Dual RCA Phone Jack for 2/3 Input
- Convention Cooling, 30 or 50 Watt (RMS)



TA 60 / TA 120 / TA 240 MIXER AMPLIFIER

Front Controls

- 6ch Volume Control, Chime Switch
- 5 Zone Speaker Selector
- 7 Band Graphic Equalizer

Rear Controls

- Switch for Channel 1 & 2 Trim Pot Control for 6 Input Channel
- Convention Cooling, 60 or 120 or 240 Watt (RMS)



TA-60R / TA-120R / TA-240R (TCM-4 DEVICE) MIXER AMPLIFIER

Front Controls

- 6ch Volume Control, Chime Switch
- 5 Zone Speaker Selector
- 7 Band Graphic Equalizer
- TCM-4 Device (FM/AM Radio, CD, MP3), Music on hold Out

Rear Controls

- Switch for Channel 1 & 2 Trim Pot Control for 6 Input Channel
- Convention Cooling, 60 or 120 or 240 Watt (RMS)



CL-603 / CL-610 FULL RANGE CEILING SPEAKER

- Compact Plastic Sealed Design Full Range Speaker System
- Perfect Frequency Response for PA and FGM
- Optimized for most Building Interiors
- Convenient & Easy Installation
- 3 or 10 Watt (RMS), 90 dB



WP-03 / WP-10 2-WAY WALL SPEAKER

- Compact Plastic Sealed Design Full Range Speaker System
- Perfect Frequency Response for PA and FGM
- Optimized for most Building Interiors
- Convenient & Easy Installation
- 3 or 10 Watt (RMS), 90 dB



WM-20T / WM-40T / WM-60T 2-WAY WALL SPEAKER

- Compact Plastic Sealed Design 2-way Speaker System
- Optimized for most Building Interiors and Semi-Indoor Installations
- Perfect Frequency Response & High Efficiency
- Built in Matching Transformer
- Easy to Use by Angle Mounting Bracket
- Weather Resistant for Versatile Installation Choices
- 20 or 40 or 60 Watt (RMS), 84 dB

PROFESSIONAL TWO-WAY RADIO UNIMO

PX-100NW

16ch Two-Way Radio(VHF)



- 136-174 MHz
- 16ch
- Enhanced Dual PTT Function
- Scrambler & De-scrambler
- Emergency Function
- DTMF / 2-Tone, CTCSS/DCS Encode and Decode
- TOT / BCL / BCLO
- 1800 mAh Li-ion Battery
- One Slot Charger

PX-400NW(B)

16ch Two-Way Radio(UHF)



- 400-470 MHz
- 16ch
- Enhanced Dual PTT Function
- Scrambler & De-scrambler
- Emergency Function
- DTMF/2-Tone, CTCSS/DCS Encode and Decode
- TOT/BCL/ BCLO
- 1800 mAh Li-ion Battery
- One Slot Charger

PZ-400NW

512ch Two-Way Radio(UHF)



- 400-470MHz, IP67
- 512ch
- Graphic LCD
- Scrambler & De-scrambler
- Emergency Function
- Wireless Cloning
- DTMF/2-Tone/5-Tone
- CTCSS/DCS Encode and Decode
- TOT/BCL/BCLO
- 2200 mAh Li-ion Battery
- One Slot Charger

ACCESSORY

Battery Charger



Battery



Ear Mic



Door Access Control *Reliable / User Friendly / Easy Installation*

Key Features

- Door Access Control
- TCP/IP and RD-485 Communications
- Remote Management and Monitoring
- Maximum Support 128 Doors
- Supports 20,000 Cards
- Supports 50,000 Events
- Unlimited Schedules
- Unlimited Group
- Full Card Holder Information
- Software Included

ADC-EOG-ME12 2 Door Access Control Board

- 2 Door Access Control Board
- TCP/IP Remote Management
- Supports up to 20k Cards
- Supports up to 50k Events
- Supports up to 20k Alarm
- Software Included

ADC-EOG-ME24 4 Door Access Control Board


- 4 Door Access Control Board
- TCP/IP Remote Management
- Supports up to 20k Cards
- Supports up to 50k Events
- Supports up to 20k Alarm
- Software Included



Door Access Control



IP Based Communications




System Integration



Remote Monitoring

ADC-2DOORKIT-NT 2 Door Kit ADC-4DOORKIT-NT 4 Door Kit

- 1x Metal Lockbox
- 1x Main Control Board
- 2x Door Strike
- 2x Card Reader
- 20x ID Card
- 1x Power Distribution Box
- with Access Control Software











- 1x Metal Lockbox
- 1x Main Control Board
- 4x Door Strike
- 4x Card Reader
- 50x ID Card
- 1x Power Distribution Box
- with Access Control Software


Door Access Control Parts


Case	Case	Outdoor ID Reader	Outdoor ID Reader	Outdoor ID Reader	Outdoor ID Reader
					
ADC-CAES-6600	ADC-CASE-6800	ADC-CR-2610	ADC-CR-2620	ADC-CR-2660	ADC-CR-2650
<ul style="list-style-type: none"> • Access Control System • Case Size: 310x230x70mm 	<ul style="list-style-type: none"> • Access Control System • Case Size: 330x300x70mm 	<ul style="list-style-type: none"> • EM Card or EM compatible Card Reader • Working Frequency: 125 KHz • Wiegand 26Bit, 5-15cm • DC12-15V 	<ul style="list-style-type: none"> • EM Card or EM compatible Card Reader with Keypad • Working Frequency: 125 KHz • Wiegand 26Bit, 5-15cm • DC12-15V 	<ul style="list-style-type: none"> • EM Card Reader • Aluminum Casing • Working Frequency: 125 KHz • Wiegand 26Bit, 5-10cm • DC12-15V 	<ul style="list-style-type: none"> • Middle-Range EM Card Reader • Working Frequency: 125 KHz • Wiegand 26Bit, 40-90cm • DC12-15V • FCC
EM ID Card	EM ID Card	ID Key FOB	Door Strike	Exit Button	Exit Button
					
ADC-CD-EM01	ADC-CD-EM04	ADC-CD-EM03	ADC-DS-3503	ADC-EB-EN50	ADC-EB-EN40
<ul style="list-style-type: none"> • EM Card • Working Frequency: 125 KHz • Sensing Distance: 5-15cm • Packaging Material: PVC • 86x54x1.8mm (White) 	<ul style="list-style-type: none"> • Middle Range EM Card • Working Frequency: 125 KHz • Sensing Distance: 5-15cm • Packaging Material: PVC • 86x54x1.8mm (White) 	<ul style="list-style-type: none"> • ID Key Tag • Working Frequency: 125 KHz • Sensing Distance: 2-5.9 inch • Material: PVC 	<ul style="list-style-type: none"> • Electric Door Strike • Lock Size: 160x25x28mm • Lock Tongue: Stainless • DC12V / 250mA • Door Type: 10-12mm 	<ul style="list-style-type: none"> • Exit Button • 86x86mm • Stainless Steel Material • DC36V / 3A • Contact Output: NO/NC/COM • 0.3 lbs 	<ul style="list-style-type: none"> • Exit Button • 86x28mm • Stainless Steel Material • DC36V / 3A
Magnetic Lock	Magnetic Lock	L-Maglock	U-Maglock	ZL-Maglock	Power Supply
					
ADC-MLK-3203A	ADC-MLK-3203B	ADC-MLK-320L	ADC-MLK-320U	ADC-MLD-320ZL	ACC-POWER-PD9M
<ul style="list-style-type: none"> • Electro-Magnetic Lock • Tenacity: 350Kg (800 lbs) • Working Voltage: DC12V • Lock Size: 285x49x28mm • Plate Size: 190x45x11mm 	<ul style="list-style-type: none"> • Electro-Magnetic Lock for Double Door • Tenacity: 350Kg (800 lbs) • Working Voltage: DC12V • Lock Size: 570x49x28mm • Plate Size: 190x45x11mm 	<ul style="list-style-type: none"> • Maglock Bearer (L-Type) • Narrow Frame Door • 90° Open • 0.42 lbs 	<ul style="list-style-type: none"> • Maglock Bearer (U-Type) • Frameless Glass Door • 180° One-way Open • 0.56 lbs • Thickness: 8-15mm 	<ul style="list-style-type: none"> • Maglock Bearer (ZL-Type) • 90° Open • 1.32 lbs 	<ul style="list-style-type: none"> • 12VDC

ACCESSORIES

<p>RG-59SI-95W/B</p>  <ul style="list-style-type: none"> • Rg-59 Coax Siamese Cable (500, 1000') 	<p>RG-59SI-95W-UL</p>  <p>UL LISTED</p> <ul style="list-style-type: none"> • Rg-59 Coax Siamese Cable-95 (1000') UL Listed 	<p>CAT5E-1000</p> <p>Also Available in Plenum</p>  <ul style="list-style-type: none"> • Cat5e Cable 1000' (Blue, Grey, Orange, White) 	<p>Cat6-1000</p>  <ul style="list-style-type: none"> • Cat6 Cable 1000' (White, Black) 	<p>PT-CP50/100/150</p>  <ul style="list-style-type: none"> • Premade Rg59 Siamese Cable (50, 100, 150') 	<p>Wire-18/2</p>  <ul style="list-style-type: none"> • Power Cable 18/2 Stranded (500, 1000')
---	--	--	---	--	--







<p>Wire-18/4</p>  <ul style="list-style-type: none"> • Power Cable 18/4 Stranded (1000') 	<p>PT-HDMI</p>  <ul style="list-style-type: none"> • HDMI Cable (10, 25') <hr/> <p>PT-HDMI-1to4</p>  <ul style="list-style-type: none"> • HDMI Splitter 1 To 4 	<p>PT-VGA-MM</p>  <ul style="list-style-type: none"> • Vga Cable (25, 50, 100') 	<p>RG6-Cable</p>  <ul style="list-style-type: none"> • Rg6 Cable 1000' (W/B) 	<p>RG6-Cable-W/B-UL</p>  <p>UL LISTED</p> <ul style="list-style-type: none"> • Rg6 Cable 1000' UL Listed 	<p>CableTie-8/11</p>  <ul style="list-style-type: none"> • Beldan Cable Ties
---	--	--	---	--	---







<p>DVC-PA2.0A</p>  <p>UL LISTED</p> <ul style="list-style-type: none"> • 2 Amp Power Adaptor; 12vdc; UL Listed 	<p>DVC-PA1.0A</p>  <p>UL LISTED</p> <ul style="list-style-type: none"> • 1 Amp Power Adaptor; 12vdc; UL Listed 	<p>PT-T5000</p>  <p>UL LISTED</p> <ul style="list-style-type: none"> • 5 Amp Power Adaptor; 12vdc; UL Listed 	<p>PT-PS-12DC-4/5Amp</p>  <ul style="list-style-type: none"> • 4ch 5amp Power Supply 	<p>PT-PS-12DC-9CH</p>  <ul style="list-style-type: none"> • 9ch Power Supply (5/10amp) 	<p>PT-PS-12DC-18CH</p>  <ul style="list-style-type: none"> • 18ch Power Supply (10/20amp)
--	--	--	---	---	--

<p>PT-PS-12DC-9/10Amp-UL</p>  <p>UL LISTED</p> <ul style="list-style-type: none"> • 9ch 10amp Power Supply; UL Listed 	<p>PT-PS-12DC-18/10Amp-UL</p>  <p>UL LISTED</p> <ul style="list-style-type: none"> • 18ch 10amp Power Supply; UL Listed 	<p>PT-24AC05A-9CH</p>  <ul style="list-style-type: none"> • 9ch 5amp Power Supply; 24vac 	<p>PT-24AC10A-18CH</p>  <ul style="list-style-type: none"> • 18ch 10amp Power Supply; 24vac 	<p>PT-GB100</p>  <ul style="list-style-type: none"> • Ground Loop 	<p>PT-P2080/PT-P2010</p>  <ul style="list-style-type: none"> • Power Pigtail Male/female
---	---	---	--	--	---







<p>PT-VB202C</p>  <ul style="list-style-type: none"> • Twisted Pair Video Balun (L) 	<p>PT-VB202E</p>  <ul style="list-style-type: none"> • Twisted Pair Video Balun 	<p>PT-VB202P</p>  <ul style="list-style-type: none"> • Twisted Pair Video Balun (W/ Pigtail) 	<p>PT-VB213A</p>  <ul style="list-style-type: none"> • Video Balun With 12vdc Power 	<p>PT-VB213B</p>  <ul style="list-style-type: none"> • Video Balun With 12vdc Power/audio 	<p>PT-VB301T</p>  <ul style="list-style-type: none"> • Single Channel Active Video Receiver For Cat5e
--	--	---	--	--	--







<p>PT-VB3010T</p>  <ul style="list-style-type: none"> • Tvi Video Balun 	<p>PT-1003</p>  <ul style="list-style-type: none"> • Bnc Female To Rca Male 	<p>PT-1004</p>  <ul style="list-style-type: none"> • Bnc Male To Rca Male 	<p>PT-1005</p>  <ul style="list-style-type: none"> • Bnc Coupler 	<p>PT-1006</p>  <ul style="list-style-type: none"> • Bnc Male To Rca Female 	<p>PT-5066</p>  <ul style="list-style-type: none"> • Bnc T Connector
--	--	--	---	--	---

<p>BNC-RG59 TWIST</p>  <ul style="list-style-type: none"> • Bnc Twist On Connector 	<p>BNC-CRIMP</p>  <ul style="list-style-type: none"> • Bnc Crimp Connector 	<p>PT-BNC59C (w/2pins)</p>  <ul style="list-style-type: none"> • Bnc Compression w/ 2pins 	<p>PT-BNC59C-PINS</p>  <ul style="list-style-type: none"> • Separate Pins For Bnc Compression 	<p>PT-BNCFCompRG59</p>  <ul style="list-style-type: none"> • Bnc Female Compression Rg59 	<p>PT-BNCFCompRG6</p>  <ul style="list-style-type: none"> • Bnc Female Compression Rg6
---	---	--	--	---	---

<p>PT-P100 (RJ45)</p>  <ul style="list-style-type: none"> • Rj45 Connector (100pcs) 	<p>B-CON</p>  <ul style="list-style-type: none"> • B-connectors Corrosion Resistant 	<p>CAPDC-1T02/1T04</p>  <ul style="list-style-type: none"> • 1to2 Power Splitter • 1to4 Power Splitter 	<p>LOCK BOX</p> <ul style="list-style-type: none"> • Lock Box (18x18x5"; 21x21x8"; 21x21x48") <p>LBB-V</p>  <ul style="list-style-type: none"> • Horizontal Wall Mount Bracket For Lock Box 	<p>LBB-H</p>  <ul style="list-style-type: none"> • Vertical Wall Mount Bracket For Lock Box 	<p>PT-LB101</p>  <ul style="list-style-type: none"> • Wall Bracket For 13-23" Lcd; Full Swing W/ Extended Neck
--	--	--	--	--	--

<p>PT-LB103</p>  <ul style="list-style-type: none"> • Wall Bracket For 13-23" Lcd; Full Swing 	<p>PT-LB5</p>  <ul style="list-style-type: none"> • Wall Brackets For 17-37" Lcd Monitor, 180 Swivel, 66lbs 	<p>PT-LB504</p>  <ul style="list-style-type: none"> • Full Motion Ceiling Brackets For 13"/23" 	<p>PT-PB42/PT-PB60</p>  <ul style="list-style-type: none"> • Full Motion Wall Brackets For 23-42" Or 32-60" 	<p>PT-PB14/PT-PB18</p>  <ul style="list-style-type: none"> • Plasma Bracket, Black, 30-63", 165lbs Or 23-32" 	<p>PT-PB01</p>  <ul style="list-style-type: none"> • Assembly Part For Pt-pb14 (Ceiling Bracket)
--	---	---	---	---	---

<p>PT-PB02</p>  <ul style="list-style-type: none"> • Ceiling Bracket - Lcd 17-30", 	<p>TI-POE04</p>  <ul style="list-style-type: none"> • 4ch PoE Switch 	<p>TI-POE08-1</p>  <ul style="list-style-type: none"> • 8ch PoE Switch With 1 Uplink (Af/at Standard) 	<p>TI-POE24-2</p>  <ul style="list-style-type: none"> • 24ch PoE Switch With 2 Uplink (Af/at Standard) 	<p>TI-POE-1P</p>  <ul style="list-style-type: none"> • 1 Ch IP Injector 	<p>HV-IPX04</p>  <ul style="list-style-type: none"> • IP Single Camera Extender (300ft.)
--	---	--	---	--	---


<p>HDEX-1000</p>  <ul style="list-style-type: none"> • HD-SDI Extender Up To 1000ft (End To End; Pair) 	<p>HV-SDIR02</p>  <ul style="list-style-type: none"> • HD-SDI Long Range Extender 600ft, (Daisy Chain Up To 5X) 	<p>HV-HDSI05</p>  <ul style="list-style-type: none"> • HD-SDI Extender Via Cat6 	<p>HV-HDSI2HDMI</p>  <ul style="list-style-type: none"> • HD-SDI To HDMI Converter 	<p>BNC-to-VGA</p>  <ul style="list-style-type: none"> • Bnc To Vga Converter 	<p>HV-HDMIEXTCAT5</p>  <ul style="list-style-type: none"> • HDMI Extender Via Cat5e
---	--	--	---	---	--

<p>S-SIGN (M/B)</p>  <ul style="list-style-type: none"> • Security Sign 	<p>PT-M350</p>  <ul style="list-style-type: none"> • Analog Test Monitor 	<p>PT-TOOL</p>  <ul style="list-style-type: none"> • Multipurpose compression tool 	<p>PT-T5009</p>  <ul style="list-style-type: none"> • Crimp only tool 	<p>MP-100</p>  <ul style="list-style-type: none"> • CCTV MICROPHONE 	<p>PT-WM101</p>  <ul style="list-style-type: none"> • Universal "L" wall bracket
--	---	---	--	--	---

CCTV / AUDIO / ACCESS CONTROL / AUTOMATION



UNITEK



ZIPATO



HPA



EYONGATE



UNIMO

www.powertechna.com
142 Myer St, Hackensack, NJ 07601
1.800.755.9068 / 201.646.0019